

**Drywall**
**09.22.00 (Support for Plaster & Gypsum Board)**

## Roll-Patches


### Continuous Patch Material

Roll patch easily installs using standard drywall compounds. The patch material is imprinted with standard receptacle patterns for easy trimming. Roll-Patch will not fuzz-up during sanding.

- Continuous roll patch allows material to be cut to any length
- Imprinted with standard electrical outlet patterns to make repairs easy
- PVC fiber composite material
- Drywall damage
- All patching applications

### Product Data & Ordering Information:

Product Code	Width	Length	Rolls/Case Pack	Cases/Pallet
RP5.5 x 20-6	5-1/2"	20'	6	24
RP5.5 x 100-4	5-1/2"	100'	4	24
RP11 x 20-6	11"	20'	6	24
RP11 x 50-1	11"	50'	1	

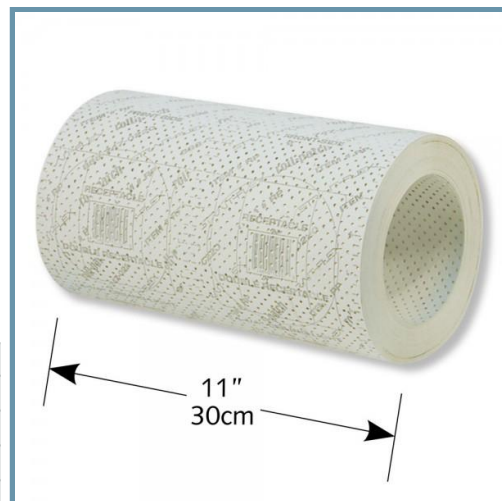

### Code Approvals & Performance Standards

- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [SDS Strait-Flex - Joint Tape](#) For Joint Tape

### Installation

- Cut patch to desired dimensions.
- Prepare surface by cleaning and lightly sanding area around receptacle.
- Apply 1/4" of quick set or drywall compound directly to back of Roll Patch.
- Flip over patch and position Roll Patch over center of repair and wipe down flat to wall using joint knife.
- Immediately skim coat edges of patch and let dry. Compound that remains on back side of Roll Patch in damaged or mis-cut areas makes Roll Patch very rigid.
- Apply second coat. Let dry and sand. Roll Patch will not fuzz up during sanding.



### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from weather and moisture.

